



ADJUSTABLE NEST DIVERTERS



NESTS ARE A CRITICAL ISSUE THAT CAN CAUSE POWER OUTAGES, FIRES AND AVIAN ELECTROCUTIONS DUE TO INCREASED BIRD ACTIVITY AROUND THE NEST.



ADJUSTS TO FIT

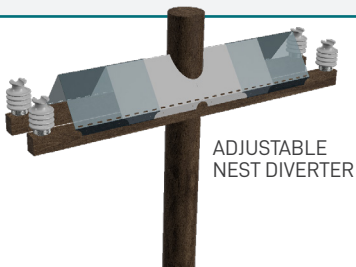

INVERTED "V" SHAPE SHEDS STICKS AND PREVENTS NESTING ABILITY - EVEN BY OSPREY AND EAGLES


EXTENDABLE DESIGN PROVIDES THE PERFECT FIT ON ALL CROSS ARM DESIGNS

INDEPENDENT RESEARCH STUDY HAS DEMONSTRATED 100% EFFICACY RATE


OPTIONS FOR DISTRIBUTION STRUCTURES, TRANSMISSION STRUCTURES, AND INTELLIRUPTERS



ADJUSTABLE NEST DIVERTERS



ADJUSTABLE DOUBLE ARM
DISTRIBUTION STRUCTURE
NEST DIVERTER
RGNS-24-43-V



H FRAME
TRANSMISSION STRUCTURE
NEST DIVERTER
RGNS-40

SKU	COVERAGE	DESCRIPTION/STRUCTURE TYPE	QTY
RGNS-24-43	24"-43"	UNIVERSAL FIT / DOUBLE CROSS ARM	10
RGNS-24-48S	24"-48"	UNIVERSAL FIT / SINGLE CROSS ARM	10
RGNS-24-43-V	24"-43"	UNIVERSAL FIT / DOUBLE CROSS ARM / V-0 MATERIAL	10
RGNS-24-48S-V	24"-48"	UNIVERSAL FIT / SINGLE CROSS ARM / V-0 MATERIAL	10
RGNS-12	12"	WOOD DOUBLE CROSS ARM	10
RGNS-12-HD	12"	WOOD DOUBLE CROSS ARM	10
RGNS-36	36"	WOOD DOUBLE CROSS ARM	10
RGNS-36-1 *	36"	WOOD DOUBLE CROSS ARM	10
RGNS-36-K	36"	WOOD DOUBLE CROSS ARM	5
RGNS-36-K-SS **	36"	FIBERGLASS OR STEEL DOUBLE CROSS ARM	5
RGNS-36S	36"	WOOD SINGLE CROSS ARM	10
RGNS-36S-1 *	36"	WOOD SINGLE CROSS ARM	10
RGNS-40	40"	H FRAME TRANSMISSION MIDSECTION	10
RGNS-40-EC	40"	H FRAME TRANSMISSION END JUNCTION	10
RGNS-48	48"	WOOD DOUBLE CROSS ARM	10
RGNS-48-1 *	48"	WOOD DOUBLE CROSS ARM	10
RGNS-48-HD	48"	WOOD DOUBLE CROSS ARM	5
RGNS-48-HD-1 *	48"	WOOD DOUBLE CROSS ARM	5
RGNS-48-K	48"	WOOD DOUBLE CROSS ARM	5
RGNS-48-K-SS **	48"	FIBERGLASS OR STEEL DOUBLE CROSS ARM	5
RGNS-SCIR-01-K ***	37.5" and 20"	S&C INTELLIRUPTER CAT. # 248122, 248123, 248124	N/A

* NEST DIVERTERS WITHOUT POLE CUT OUTS ARE DESIGNED FOR DOUBLE CROSS ARM STRUCTURES WITH ARMS MOUNTED 6'+ BELOW POLE TOP

** INCLUDES SUPER STRAP BANDING FOR EASY INSTALLATION

*** ADDITIONAL MODELS AVAILABLE TO FIT NON DISCONNECT STYLES WITH OR WITHOUT SECONDARY TRANSFORMERS

TESTS // NON V-0 NEST DIVERTERS

RESULTS

ASTM G-154 / 4329 ACCELERATED WEATHER TESTING REPORT COMING SOON - IN HOUSE

ASTM D-149 DIELECTRIC STRENGTH >30KV @ .040"

PROPERTIES

RESULTS

ASTM D1822 TENSILE IMPACT >200 FT-LB/IN

ASTM D746 LOW TEMPERATURE BRITTLENESS <-76C

ASTM D1693 ENVIRONMENTAL STRESS CRACK RESISTANCE >1,000 HRS

TESTS // V-0 NEST DIVERTERS

RESULTS

ASTM D-149 DIELECTRIC STRENGTH >50KV

ASTM D-638 COMPARATIVE TRACKING >500V

ASTM G-26 ACCELERATED WEATHER TESTING >1000 HRS

PROPERTIES

RESULTS

UL-94 FLAMMABILITY V-0 / 5VA

UL 746C OUTDOOR WEATHERABILITY F1

