


FLEXIBLE SLEEVE INSULATOR COVERS



INSULATOR COVERS PROTECT INSULATORS AND THE CONDUCTOR AND PREVENT ELECTROCUTIONS BY INSULATING DANGEROUS ENERGIZED AREAS.



ONLY FLEXIBLE SLEEVE COVER IN THE INDUSTRY



SLEEVES EASILY WRAP AROUND ANY BENDS OR CHANGES IN HEIGHT WITHOUT GAPS

ARRIVES IN 1 PIECE - NO NEED FOR ASSEMBLY ON SITE, NO CHANCE FOR SLEEVE SEPARATION

SNAP-FITS INTO POSITION

72" MINIMUM COVERAGE (EXCEEDS 60" MIN REQUIREMENT) FOR SUPERIOR COVERAGE

COVERS ENERGIZED PORTION OF THE INSULATOR, ALLOWING SHEDS TO NATURALLY CLEAN AND BE EASILY VIEWED DURING INSPECTIONS

OPTIONS TO FIT ALL INSULATOR STYLES


VIDEOS +
MORE INFO




FLEXIBLE SLEEVE INSULATOR COVERS



UNIVERSAL FLEXIBLE
UNIVERSAL CLAMP TOP
INSULATOR COVER
CC-FLEX-UCT-125

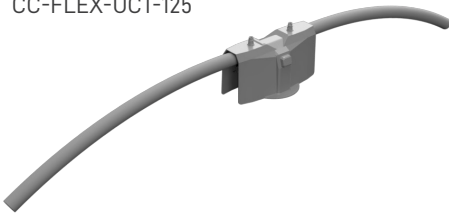

FLEXIBLE DOUBLE TOP TIE
CF NECK
INSULATOR COVER
CC-DFLEX-CF-125

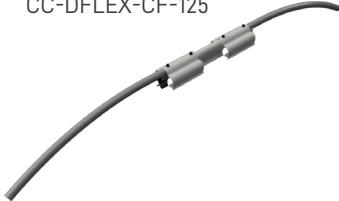

INSULATOR NECK/CAP OPTIONS



C/F J/K TRUNNION UNIVERSAL CLAMP TOP UNIVERSAL VISE TOP



HOT STICK
INSTALLATION TOOL SET
CC-FLEX-AT-K

SKU	TYPE	LENGTH	I.D.	INSULATOR	CONDUCTOR RANGE	KV RATING	QTY
CC-DFLEX-CF-100	CF	91.5"-95.5" / 2.32 M - 2.42 M	1" / 2.54 CM	DOUBLE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	.25" - 1.1" / .635 CM - 2.8 CM	35	5
CC-DFLEX-CF-125	CF	91.5"-95.5" / 2.32 M - 2.42 M	1 1/4" / 3.17 CM	DOUBLE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	1" - 1.35" / 2.54 CM - 3.43 CM	35	4
CC-DFLEX-JK-100	JK	91.5"-95.5" / 2.32 M - 2.42 M	1" / 2.54 CM	DOUBLE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	.25" - 1.1" / .635 CM - 2.8 CM	35	5
CC-DFLEX-JK-125	JK	91.5"-95.5" / 2.32 M - 2.42 M	1 1/4" / 3.17 CM	DOUBLE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	1" - 1.35" / 2.54 CM - 3.43 CM	35	4
CC-DFLEX-TR-100	TRUNNION	91.5"-95.5" / 2.32 M - 2.42 M	1" / 2.54 CM	TRUNNION	.25" - 1.1" / .635 CM - 2.8 CM	44	5
CC-DSTFLEX-CF-100	CF	91.5"-95.5" / 2.32 M - 2.42 M	1" / 2.54 CM	DOUBLE SIDE TIE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	.25" - 1.1" / .635 CM - 2.8 CM	35	5
CC-DSTFLEX-CF-125	CF	91.5"-95.5" / 2.32 M - 2.42 M	1 1/4" / 3.17 CM	DOUBLE SIDE TIE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	1" - 1.35" / 2.54 CM - 3.43 CM	35	4
CC-STFLEX-CF-100	CF	80" / 2.03 M	1" / 2.54 CM	ANSI 55-3, 55-4, 55-5, 55-6, 55-7	.25" - 1.1" / .635 CM - 2.8 CM	35	10
CC-STFLEX-CF-125	CF	80" / 2.03 M	1 1/4" / 3.17 CM	ANSI 55-3, 55-4, 55-5, 55-6, 55-7	1" - 1.35" / 2.54 CM - 3.43 CM	35	8
CC-FLEX-CF-100	CF	80" / 2.03 M	1" / 2.54 CM	ANSI 55-3, 55-4, 55-5, 55-6, 55-7	.25" - 1.1" / .635 CM - 2.8 CM	35	10
CC-FLEX-CF-125	CF	80" / 2.03 M	1 1/4" / 3.17 CM	ANSI 55-3, 55-4, 55-5, 55-6, 55-7	1" - 1.35" / 2.54 CM - 3.43 CM	35	8
CC-FLEX-JK-100	JK	80" / 2.03 M	1" / 2.54 CM	ANSI 55-3, 55-4, 55-5, 55-6, 55-7	.25" - 1.1" / .635 CM - 2.8 CM	35	10
CC-FLEX-JK-125	JK	80" / 2.03 M	1 1/4" / 3.17 CM	ANSI 55-3, 55-4, 55-5, 55-6, 55-7	1" - 1.35" / 2.54 CM - 3.43 CM	35	8
CC-FLEX-TR-100	TRUNNION	80" / 2.03 M	1" / 2.54 CM	TRUNNION	.25" - 1.1" / .635 CM - 2.8 CM	44	10
CC-FLEX-TR-125	TRUNNION	80" / 2.03 M	1 1/4" / 3.17 CM	TRUNNION	1" - 1.35" / 2.54 CM - 3.43 CM	69	10
CC-FLEX-UCT-125	CLAMP TOP	80" / 2.03 M	1 1/4" / 3.17 CM	BOLT ACTUATED TOP CLAMP	1" - 1.35" / 2.54 CM - 3.43 CM	46	10
CC-FLEX-UVT-125	VISE TOP	80" / 2.03 M	1 1/4" / 3.17 CM	VISE TOP	1" - 1.35" / 2.54 CM - 3.43 CM	35	10
CC-CF *	CF	-	-	ANSI 55-3, 55-4, 55-5, 55-6, 55-7		35	25
CC-JK *	JK	-	-	ANSI 55-3, 55-4, 55-5, 55-6, 55-7		35	25
CC-TR *	TRUNNION	-	-	TRUNNION		69	10

* CAP WITH TWO RETENTION SLEEVES FOR INSTALLATION OVER LINE HOSE

TOOL

CC-FLEX-AT-K HOTSTICK COMPATIBLE INSTALLATION TOOL SET FOR ALL FLEXIBLE CONDUCTOR COVERS

* LHT-100-125 TOOLS ARE ALSO HOTSTICK INSTALLATION COMPATIBLE

TESTS

TESTS	RESULTS
IEEE 1656 / 5.2 DRY WITHSTAND	>20 KV
IEEE 1656 / 5.6 ULTRAVIOLET AGING / ASTM G-155	1,000 HRS
ASTM D149 DIELECTRIC STRENGTH	938 V/MIL (36.9 KV/MM)
ASTM D 3638 COMPARATIVE TRACKING INDEX	526 V
ASTM D-638 / D-1822 ORIGINAL TENSILE IMPACT	56.7 FT LB/SQ IN
ASTM D-638/ D-1822 WEATHERED TENSILE STRENGTH	51.04 FT LB/SQ IN