



RIGID SLEEVE INSULATOR COVERS

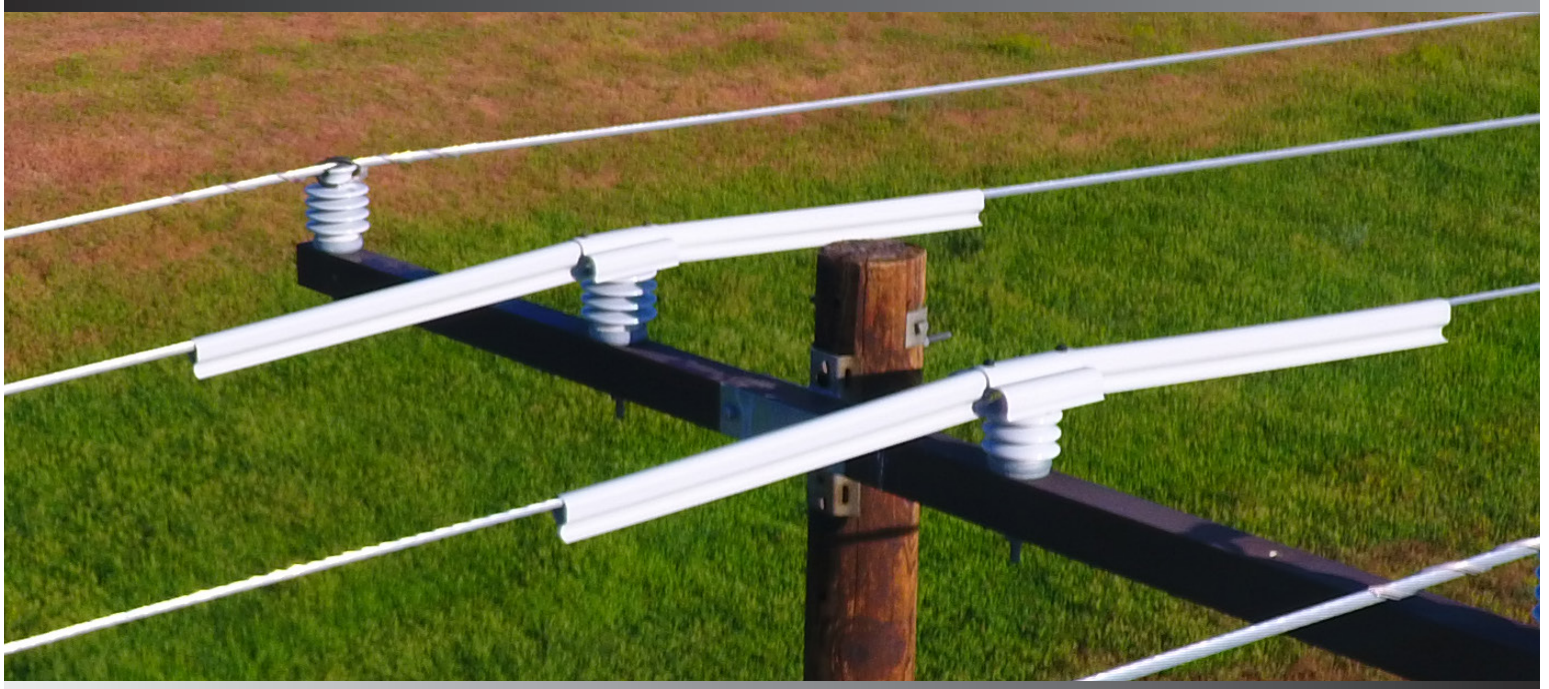

INSULATOR COVERS PROTECT INSULATORS AND THE CONDUCTOR AND PREVENT ELECTROCUTIONS BY INSULATING DANGEROUS ENERGIZED AREAS.



DOUBLE TOP CAPS ADJUST TO FIT



SNAP-FITS INTO POSITION

72" MINIMUM COVERAGE (EXCEEDS 60" MIN REQUIREMENT) FOR SUPERIOR COVERAGE

COVERS ENERGIZED PORTION OF THE INSULATOR, ALLOWING SHEDS TO NATURALLY CLEAN AND BE EASILY VIEWED DURING INSPECTIONS

OPTIONS TO FIT ALL INSULATOR STYLES

EASY HOTSTICK INSTALL - NO LOCKING PINS

VIDEOS +
MORE INFO



RIGID SLEEVE INSULATOR COVERS



RIGID SINGLE TOP TIE
CF NECK
INSULATOR COVER
CC-STT-CF



RIGID DOUBLE TOP TIE
CF NECK
INSULATOR COVER
CC-DTT-CF



INSULATOR NECK/CAP OPTIONS



C/F



J/K



TRUNNION



RIGID COVER HOT STICK
INSTALLATION TOOLS
CC-AT

SKU	TYPE	LENGTH	INSULATOR	KV RATING	QTY
CC-DST-CF	CF	91.5"-95.5" / 2.32 M - 2.42 M	DOUBLE SIDE TIE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	35	5
CC-DST-JK	JK	91.5"-95.5" / 2.32 M - 2.42 M	DOUBLE SIDE TIE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	35	5
CC-DTT-CF	CF	91.5"-95.5" / 2.32 M - 2.42 M	DOUBLE TOP TIE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	35	5
CC-DTT-JK	JK	91.5"-95.5" / 2.32 M - 2.42 M	DOUBLE TOP TIE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	35	5
CC-STT-CF	CF	80" / 2.03 M	SINGLE TOP TIE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	35	10
CC-STT-CF-18	CF	42" / 1.07 M	SINGLE TOP TIE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	35	25
CC-STT-JK	JK	80" / 2.03 M	SINGLE TOP TIE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	35	10
CC-STT-JK-18	JK	42" / 1.07 M	SINGLE TOP TIE ANSI 55-3, 55-4, 55-5, 55-6, 55-7	35	25
CC-STT-TR	Trunnion	80" / 2.03 M	TRUNNION	38	10
CC-STT-TR-18	Trunnion	42" / 1.07 M	TRUNNION	38	10
CC-STT-TR-HD	Trunnion	80" / 2.03 M	TRUNNION	38	10
CC-CF *	CF	-	ANSI 55-3, 55-4, 55-5, 55-6, 55-7	35	25
CC-JK *	JK	-	ANSI 55-6, 56-1, 56-6, 56-7, 56-2, 56-3	35	25
CC-TR *	Trunnion	-	TRUNNION	69	10

* CAP WITH TWO RETENTION SLEEVES FOR INSTALLATION OVER LINE HOSE

TOOLS

CC-AT	Hotstick compatible installation tool for all standard sleeves
CC-AT-HD	Hotstick compatible installation tool for HD sleeve conductor cover CC-STT-TR-HD

TESTS

RESULTS

IEEE 1656 / 5.2 DRY WITHSTAND	>20 KV
IEEE 1656 / 5.6 ULTRAVIOLET AGING / ASTM G-155	1,000 HRS
ASTM D149 DIELECTRIC STRENGTH	938 V/MIL (36.9 KV/MM)
ASTM D 3638 COMPARATIVE TRACKING INDEX	526 V
ASTM D-638 / D-1822 ORIGINAL TENSILE IMPACT	56.7 FT LB/SQ IN
ASTM D -638/ D-1822 WEATHERED TENSILE STRENGTH	51.04 FT LB/SQ IN