


RGNS-551L-series components:



Each 16" (40.6cm) diverter requires:
4x 24" (61cm) super straps + 4x buckles




Scan to view
intro video

Kit options:

RGNS-551L-8M-K


8 meter arm



4x part A
3x part B
13x part C
2x part D

RGNS-551L-10M-K


10 meter arm

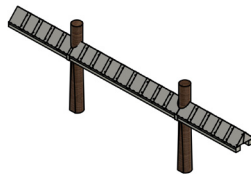

4x part A
3x part B
18x part C
2x part D

RGNS-551L-12MK


12 meter arm

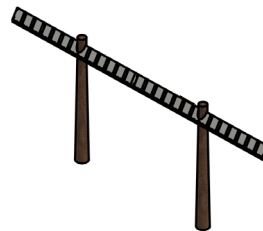

4x part A
4x part B
21x part C
2x part D


RGNS-551L-12MK-3P

12 meter arm

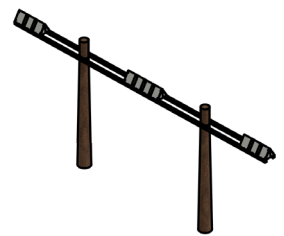

4x part C
6x part D



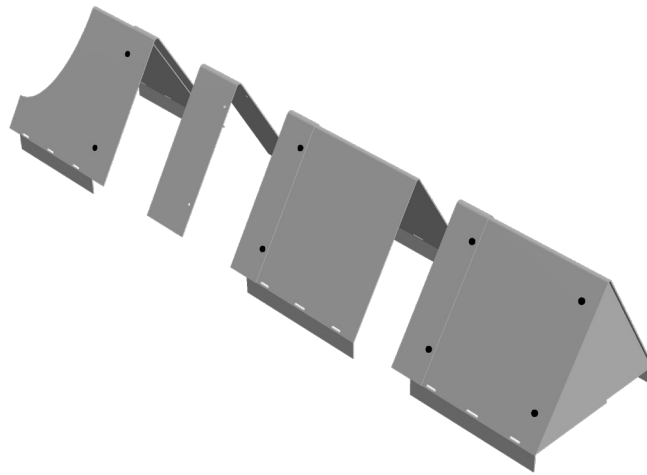

SKU	Coverage
RGNS-551L-8M-K	26.25 ft / 314.96 in (8 meter)
RGNS-551L-10M-K	32.81 ft / 393.7 in (10 meter)
RGNS-551L-12M-K	39.37 ft / 472.44 in (12 meter)
RGNS-551L-12M-K-3P	39.37 ft / 472.44 in (12 meter)

Properties

ASTM D-149 Dielectric Strength	>50KV *can be installed on all system voltages, refer to standard air gap clearances for your application
ASTM D-638 Comparative Tracking	>500V
ASTM G-26 Accelerated Weather Testing	>1000 hrs
UL 746c Outdoor Weatherability	F1
UL-94 Flammability	V-0 / 5VA

